

## 100W CPC semi-flexible solar panel

### Warranty


- ◆ 2 years Manufacturer Warranty

### Manufacturing

- ◆ Original cell sorting system ensures the best electric cell match
- ◆ EL-Testing before packing.
- ◆ Comprehensive module power testing.

### Performance

- ◆ Upgraded efficiency and unprecedented flexibility.
- ◆ The CPC material used on the surface has good weather resistance and high light transmittance.
- ◆ Sturdy materials and stable workmanship make it possible to walk on the panels.
- ◆ IP67 rated junction box, reliable cables and standard MC4 connectors improve the stability.

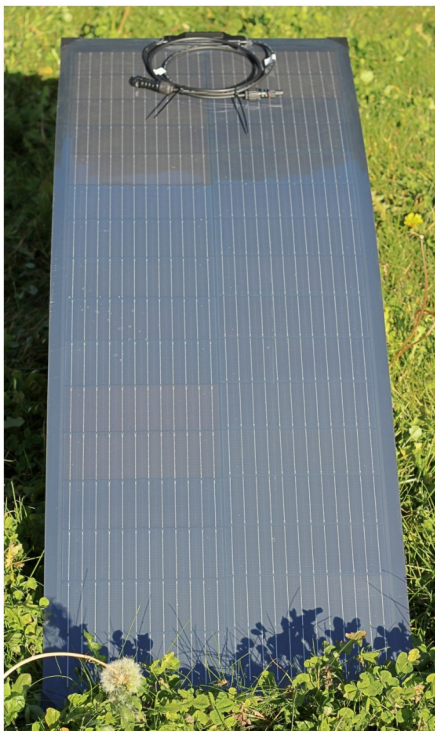

### Mechanical Data

Standard Test Conditions AM=1.5, E=1000W/m<sup>2</sup>, TC=25°C

Nominal Power	100W
Cell Type	Monocrystalline
Model of Cells	182mm
Maximum Power Current (Impp)	5.38A
Maximum Power Voltage (Vmpp)	18.69V
Open-circuit Voltage (Voc)	21.89V
Short-circuit Current (Isc)	5.72A
Maximum System Voltage	100V
Output Tolerance	±3%
Cable	900mm / 2.5mm <sup>2</sup>
Connector Type	MC4 / MC4 Compatible
Module Structure	CPC/EVA / Backsheet
Junction box rating	IP67
Diode	✓
Working Temperature	-20°C~+65°C

### Packaging

Module Dimensions	1230*470*2mm
Module Weight	2.5kg
Package	Single Package
Pieces per Pallet	30
Gross Weight per Pallet	110
Pallet Dimensions	1240*1100*630mm



**LLUMOR**  
PASIÓN POR LA EFICIENCIA ENERGÉTICA

ES 25710 CASTELLCIUTAT / Lleida, Ctra. N-260, N°18  
+34 973355504 | +34 619770556

info@llumor.es | www.llumor.es

